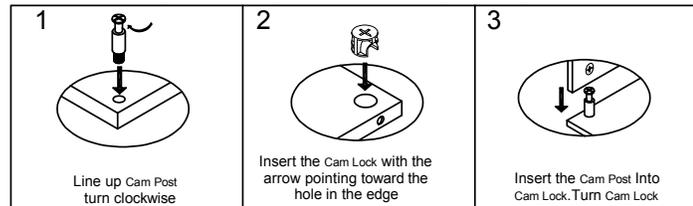




**96" Standing Height Conf. Table**
**P.1**


1  60*50*3mm 4 PCS	2  M8 Nut 28 PCS	3  Stand-off Ø20*76 4 PCS	4  Leveler 4 PCS	5  Wire Management Tray 570mm 2 PCS	6  T Support 60*20*100mm 8 PCS	7  Screw M6*65mm 12 PCS
8  Screw M8*40mm 20 PCS	9  Screw M4*14mm 16 PCS	10  Screw M6*15mm 26 PCS	11  Screw M6*40mm 8 PCS	12  Screw M6*20mm 8 PCS	13  M6 Nut 8 PCS	14  Cam Sticker 26 PCS
15  Cam Post 26 PCS	16  Cam Lock 26 PCS	17  M8*20mm 8 PCS	18  Wrench 4mm 1 PC	19  Wrench 5mm 1 PC	20  wrench(M6) 1 PC	21  wrench(M8) 1 PC

**CAM INSTRUCTION**


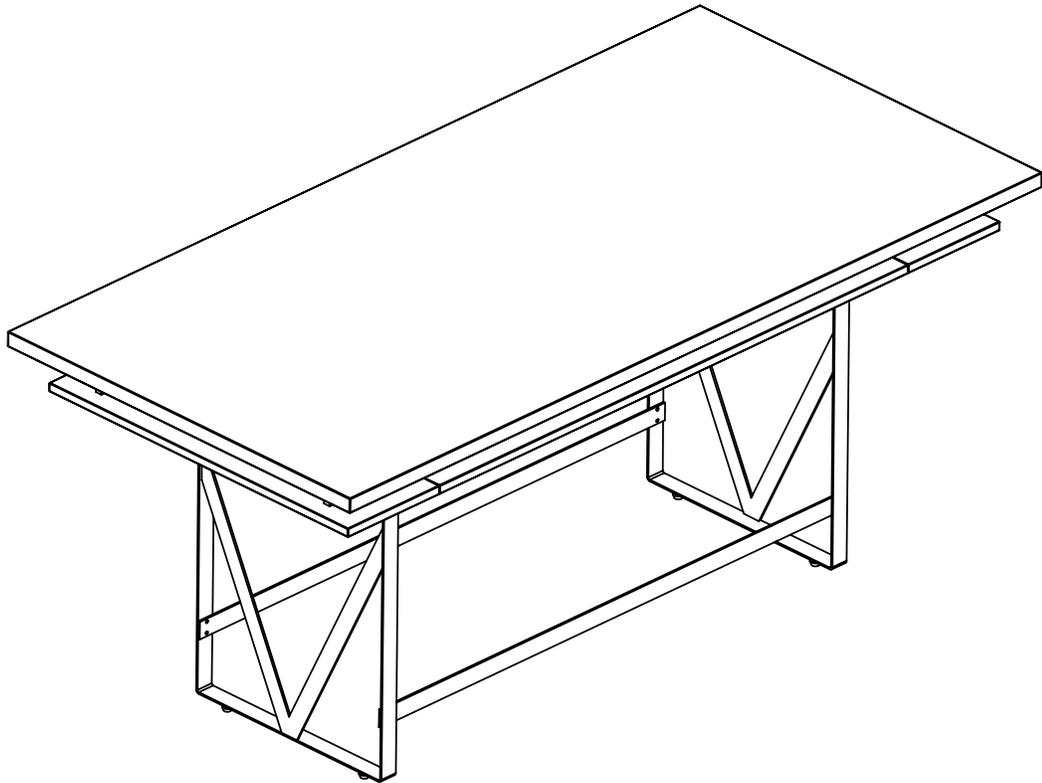
A  Short Modesty Panel 2 PCS	B  Long Modesty Panel 2 PCS	C  Short Fixed Shelf 2 PCS	D  Long Fixed Shelf 2 PCS	E  Frame (1620mm) 2 PCS	F  Foot Rest (1636mm) 2 PCS	G  Shelf Support Rail(1636mm) 2 PCS
--	---	--	---	--	---	--

**EVST8AGG**
**EVSTBBK**

**IMPORTANT NOTE:**

- Place all wooden parts on a clean and smooth surface such as a rug or carpet to avoid the parts from being scratched
- Check that you have all parts and hardware.
- Remove all wrapping materials, including staples & packing straps before you start assemble.
- Do not tighten all screws or bolts until all completely assembled.
- Keep all hardware parts out of reach of children.


96" Standing Height Conf. Table

P.2




**96" Standing Height Conf. Table**
**P.3**


- 1** Use Screw (8, 17 & 12) to connect Leg (I), Frame (E) and Foot Rest (F) together;

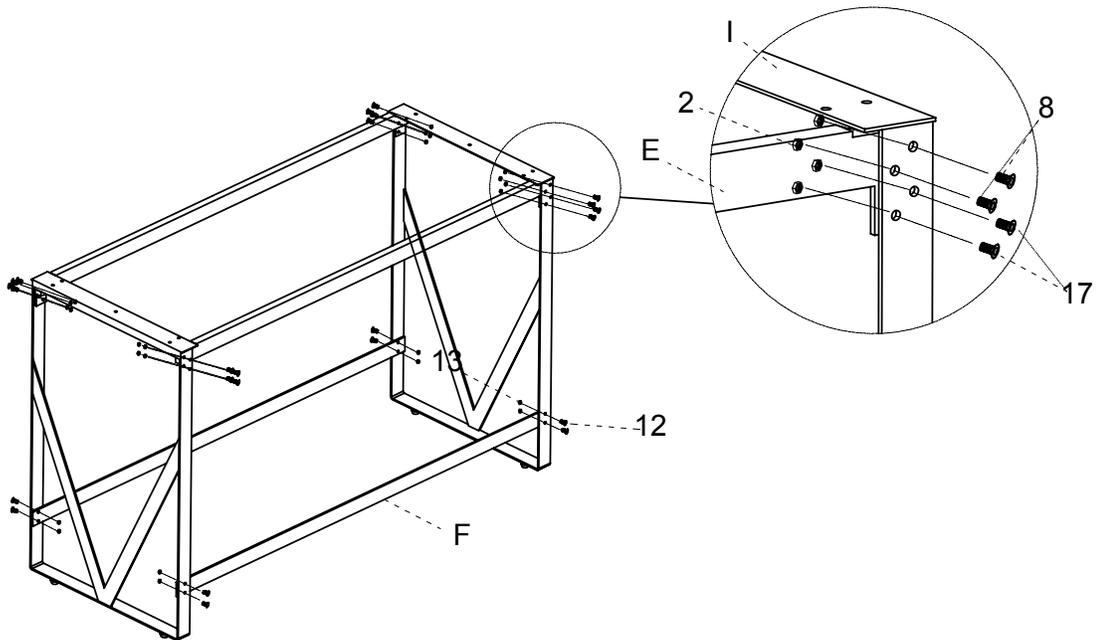

- 2** Install the T Support (6) and the Stand-off (3) to the Top (H), Use the Levelers (4) to install the Wire Management Tray (5) to the Stand-off (3);

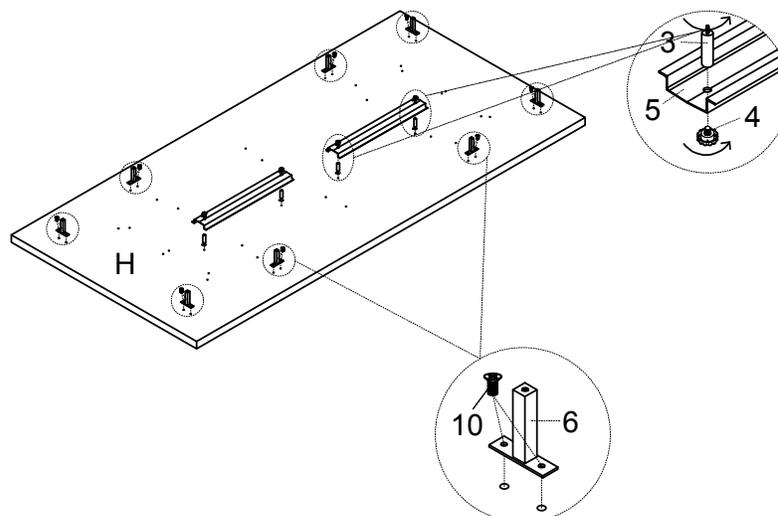


## 96" Standing Height Conf. Table


P.4



- ③ Use the Screw (7&10) to connect the Legs (I) and the Frame (E) to the Top (H);

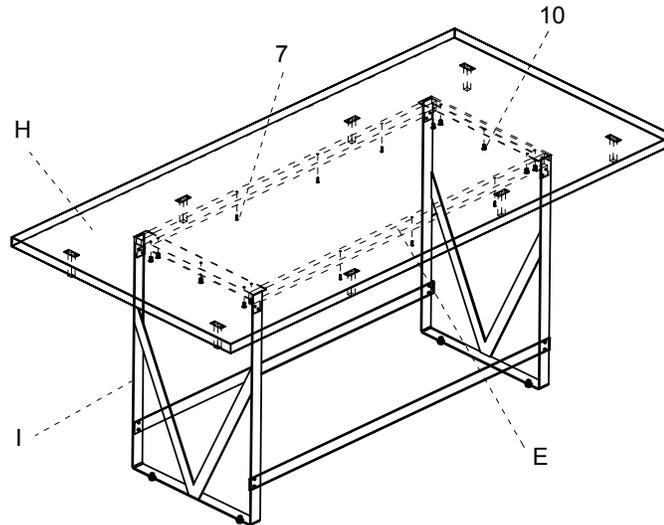


- ④ Insert the Cam Lock (15) to the Top Panel (H), Install the Klix Cam (16) on the Modesty Panel (A&B), Fasten the Klix Cam, Attach the Cam Sticker (14) to the cams;

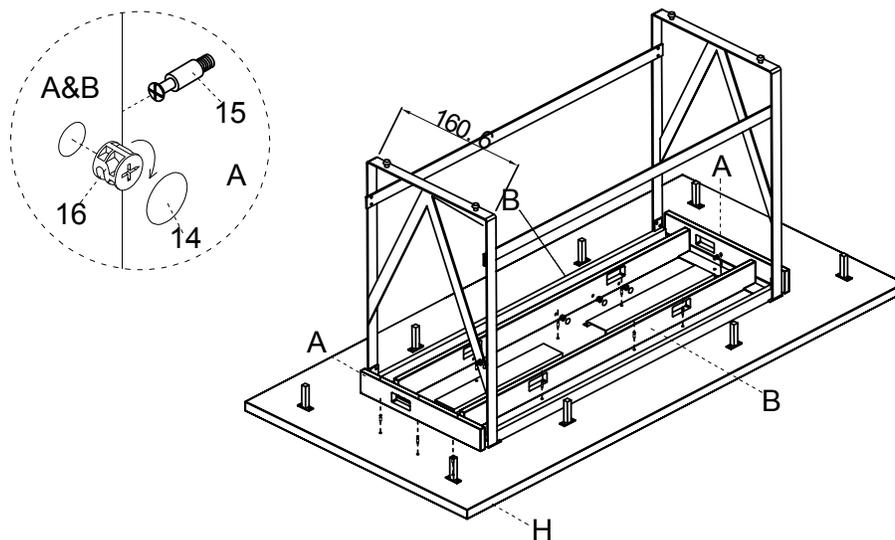

96" Standing Height Conf. Table



- 5** Insert the Cam Lock (15) to the Fixed Shelf (C&D), Install the Klix Cam (16) on the Modesty Panel (A&B), Fasten the Klix Cam, Attach the Cam Sticker (14) to the cams;

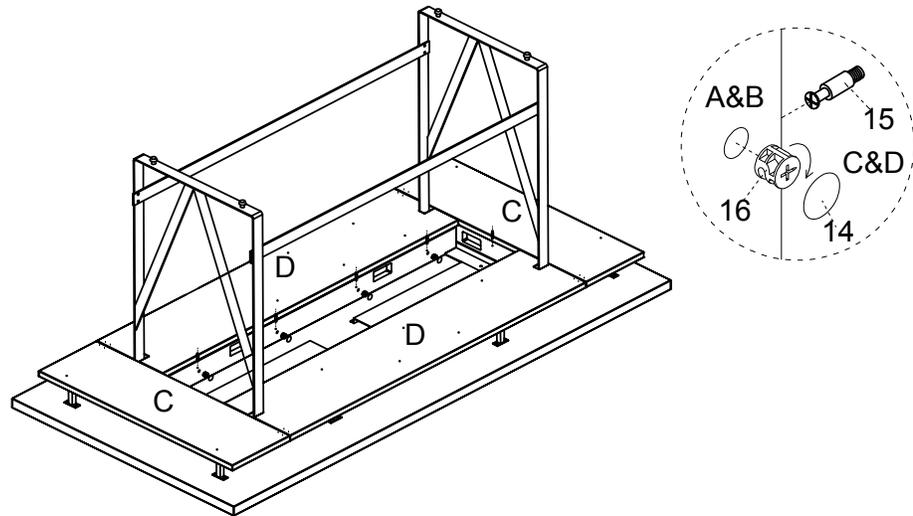

- 6** Use the Screw (11) to connect the T Support (6) and the Fixed Shelf (C&D); Use the Screw (9) to connect the Metal Plate (1) and the Fixed Shelf (C&D); Use the Screw (8) to connect the Leg (I) and the Frame (G); Use the Screw (7) to connect the Fixed Shelf (D) and the Frame (G);

